


The P5-4ZA series is a fully automated tray and cup seal system capable of producing vacuum-gas MAP packs, vacuum skin packs (VSP) and/or no MAP sealed trays and cups. The P5-4ZA can be equipped with up to 3 sealing stations to achieve production rates of up to 150 trays per minute (no MAP). Customers can also choose to run different products at each seal station and significantly reduce their change over time. Seal head changeover can be accomplished in under 5 minutes with an optional ergonomically efficient seal head storage cart.

The P5-4ZA can be customized for your specific packaging line layout and integrated with a variety of options and components to create a fully turnkey packaging line. Point Five Packaging will assist you by conceptualizing, designing and developing infeed and outfeed conveyor lines, tray denesters, fillers and depositors, markers/printing machines, aligning devices, etc. The userfriendly color touch screen display allows easy product set up and change over and can store up to 99 product programs. Operators may also choose between English, Spanish and French screen translations.

A FOOD PACKAGING POWERHOUSE

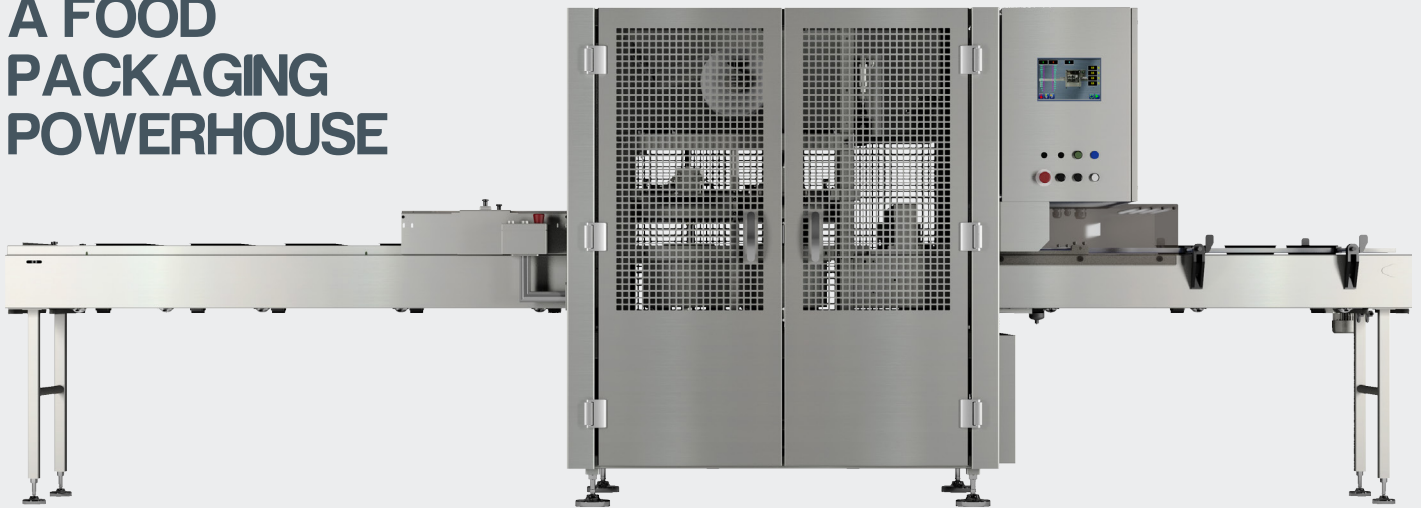


System Advantages

- Heavy duty 304 stainless steel wash-down construction ideal for food packing environments
- Configurable up to 3 seal head stations
- Automatic servo flight bar infeed system
- Customizable infeed options such as automatic tray denesters, lane dividers, variable lengths and depositor and filler integration
- User friendly, 7.2" PLC color touch screen, operator interface
 - Up to 99 stored product recipes
 - Language selection (English, Spanish or French)
 - Integrated temperature control
 - Menu-driven MAP parameters including gradual vacuum and sealing only
 - USB/Ethernet port
- NEMA 4X electrical enclosure
- All electrical components are UL rated
- Interlocked safety guarding
- Easy to load film rack with automatic scrap take up
- Optional print registration
- Tool-less vacuum chamber removal ensures high standards of hygiene and cleanliness
- Easy seal head change in less than 5 minutes - optional seal head storage cart with pre-heating feature
- Produce MAP, non-MAP, and VSP packs on the same seal head
- Various optional size vacuum pumps
- Interlocked guarding with easy access points for sanitation and change over
- Customizable discharge options such as lane mergers, lid applicators, labelers, right angle take away and more






User friendly color touch screen operator interface

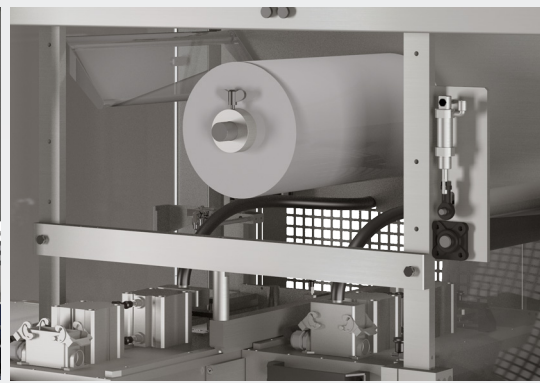

Easy to load film rack

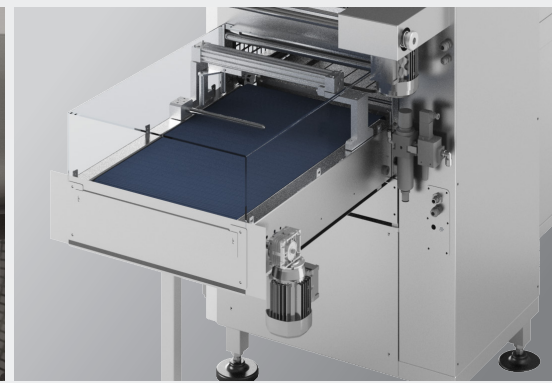

Optional lane merger at machine discharge

Technical Specifications

	P5-4ZA-1	P5-4ZA-2	P5-4ZA-3
Machine Dimensions (inches)			
Weight (base machine only) lbs. (kg)	1,980 (900)	2,090 (950)	2,200 (1,000)
Frame Construction	Wash-down stainless steel	Wash-down stainless steel	Wash-down stainless steel
Electrical Supply (standard)	220V 3Ph 60Hz	220V 3Ph 60Hz	220V 3Ph 60Hz
Estimated Amperage (amp)	5.7 - 13.6	9.4 - 17.5	12.8 - 21
Available Vacuum Pump Options m³/h)	100 / 200 / 300	100 / 200 / 300	100 / 200 / 300
Max Reel Film Width Inches (mm)	21.5 (550)	21.5 (550)	21.5 (550)
Max Reel Film Diameter Inches (mm)	9.75 (250)	9.75 (250)	9.75 (250)
Maximum Tray Dimensions	<p>1 up 18.5X10.8" 470X275mm 2 up 8.6x10.8" 220x275mm 3 up 5.7X10.8" 145x275mm 4 up 3.9X10.8" 100x275mm Max Depth 4.7" (120mm)</p>	<p>2 up 18.5X10.8" 470X275mm 4 up 8.6x10.8" 220x275mm 6 up 5.7X10.8" 145x275mm 8 up 3.9X10.8" 100x275mm Max Depth 4.7" (120mm)</p>	<p>3 up 18.5X10.8" 470X275mm 6 up 8.6x10.8" 220x275mm 9 up 5.7X10.8" 145x275mm 12 up 3.9X10.8" 100x275mm Max Depth 4.7" (120mm)</p>